


GENERAL FITTING GUIDE - LED MIRRORS


ELECTRICAL SAFETY INFORMATION

We recommend that all electrical bathroom products must be installed in accordance with current building and wiring regulations. If in doubt please contact an electrician. Before drilling ensure that there are no hidden cables or pipes in the wall.
 Note: to ensure the normal use of this products, it is required to set out wires as per the regulations of IEE at the installation places. The products are only to be installed indoors.
 Incorrect installation may lead to product damage, personal injury and invalidate any guarantees.

TOOLS REQUIRED




FIXINGS




SCREW FIXING POINTS (Rear View)


Choose Portrait or Landscape installation.
 Measure the distance between the two holes.

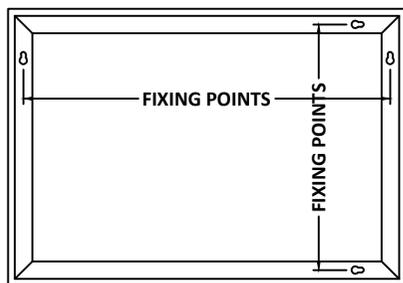

Measure the distance between the two holes on the wall and drill holes for wall plugs ensuring the holes are drilled level.



Drill wall for wall plugs.




Fit the wall plugs into the wall and fix using screws.




BRACKET FIXING POINTS (Rear View)


Choose Portrait or Landscape installation.

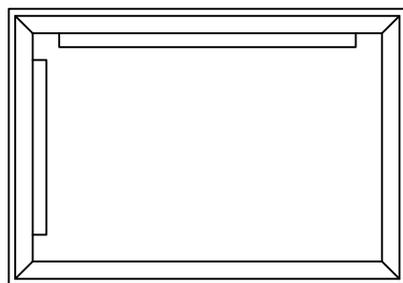


Level the wall hanging bracket and mark the fixing positions with a pencil.



Drill wall for wall plugs.



Fit the wall plugs into the wall and fix using screws.



INSTALLATION


Note! It is recommended that this product is installed by two people. Ensure the domestic electrical mains supply to which the mirror being connected is turned off. Connect the domestic mains supply to the terminal box according to the wiring diagram below.

ELECTRICAL INFORMATION

All installations must comply with guidelines which are based on a zonal concept and must be followed to ensure the safe installation of electrical appliances in the bathroom.

These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations.


This product is IP44 rated and is suitable for installation in ZONE 2 and Outside Zone

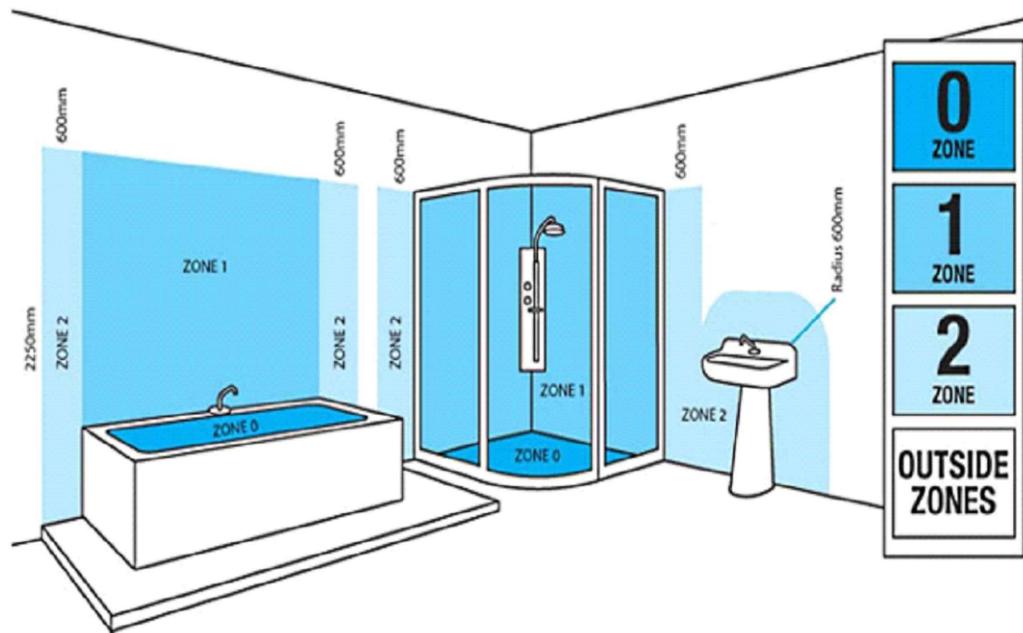

WIRING DIAGRAM

MIRROR

MAINS SUPPLY

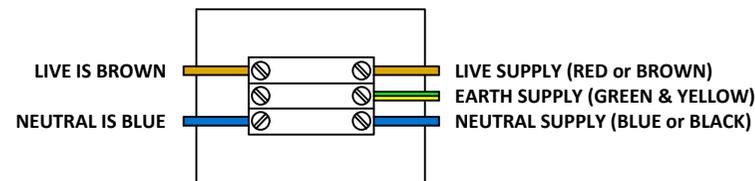

OPERATION

To switch ON/OFF, touch the mirror sensor. Hold the sensor until the desired brightness is obtained. The light brightness is then set until changed again. The de-mister pad will activate when the mirror is ON.

AFTERCARE

To preserve the high quality finish of your product, please ensure you regard the following care and cleaning recommendations: Use only a soft damp cloth. Use only a soft damp cloth. Use only a soft damp cloth.

